


Test and Drain Valve (T.D402),



T.D402



- Design Standard: FM1625, UL258
- Connection standard: ASME B1.20.1
BS EN 10226-2 (ISO 7-1)
- Working Pressure: 300PSI
- Working Temperature: 0°C - 80°C
- Orifice Diameter: K2.8/4.2/5.6/8.0/11.2

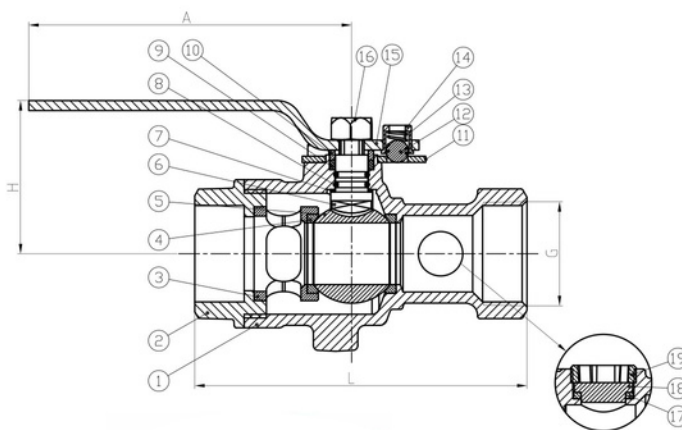

MATERIAL SPECIFICATION

Part No.	Part	Standard Specification	Options
1	Body	CW617N	
2	Bonnet	CW617N	
3	Bonnet Extension	CW612N	
4	Ball Seat	PTFE	
5	Ball	CW617N	
6	Stem	CW612N	
7	Stem Seal	PTFE	
8	O-Ring	NBR	
9	Stem Seal	PTFE	
10	Ring	CW612N	
11	Label Plate	AISI 304	AISI 316
12	Bearing Ball	AISI 304	AISI 316
13	Spring	AISI 304	AISI 316
14	Bearing Ball Centering	CW612N	
15	Lever	AISI 304	AISI 316
16	Nut With Fiber		
17	Sight Glass Seal	EPDM	
18	Sight Glass	PMMA	
19	Sight Glass Gasket	CW612N	

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

DN		Dimensions(mm)			
Inch	mm	L	H	A	G
1"	25	134.5	63.5	130	BSPT 1"/NPT 1"
1 1/4"	32	135.5	64.5	132.5	BSPT 1 1/4"/NPT 1 1/4"
1 1/2"	40	163.5	79	152	BSPT 1 1/2"/NPT 1 1/2"
2"	50	167	79	152	BSPT 2"/NPT 2"