


Vertical Indicator Post (VP), UL/FM Approved



VP

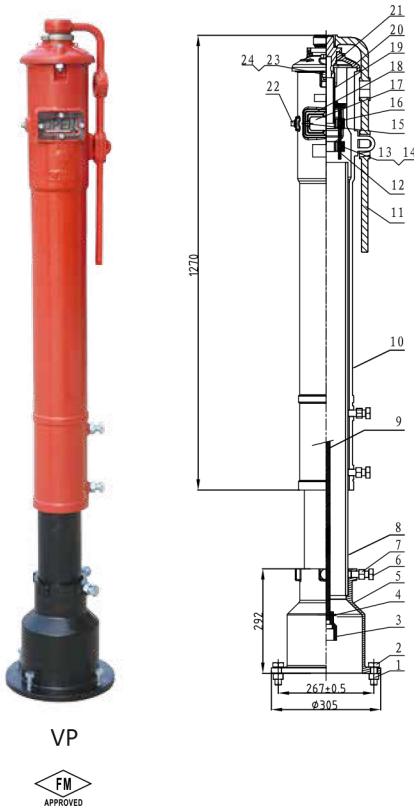

- **Statement:**
Vertical indicator post provides a means to operate a buried or otherwise inaccessible valve and able to indicate the open or shut position of the valve.
- **Coating:**
Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550

MATERIAL SPECIFICATION

Part No.	Part	Standard Specification	Options
1	Hex Nut	Carbon Steel Zinc Plated	AISI 304, AISI 316
2	Hex Bolt	Carbon Steel Zinc Plated	AISI 304, AISI 316
3	Socket	ASTM A536, 65-45-12	
4	Cotter Pin	AISI 304	
5	Base Flange	ASTM A536, 65-45-12	
6	Hex Bolt	Carbon Steel Zinc Plated	AISI 304, AISI 316
7	Hex Nut	Carbon Steel Zinc Plated	AISI 304, AISI 316
8	Standpipe	Carbon Steel ASTM A53	
9	Stem 1" Square	Carbon Steel AISI 1045	
10	Body	ASTM A536, 65-45-12	
11	Locking Wrench	ASTM A536, 65-45-12	
12	Target Carrier Nut	AISI 304 (DN100-400) HPb59-1 (DN450-600)	
13	Hex Bolt	Carbon Steel Zinc Plated	AISI 304, AISI 316
14	Hex Nut	Carbon Steel Zinc Plated	AISI 304, AISI 316
15	Hex Bolt	Carbon Steel Zinc Plated	AISI 304, AISI 316
16	Instructs The Plane	ASTM A536, 65-45-12	
17	Window Glass	Plexiglass	
18	Gasket	EPDM	
19	Operating NUT	AISI 304	
20	Top Section	ASTM A536, 65-45-12	
21	Snap Ring	Stainless Steel AISI11066	
22	Plug	Malleable Rion Galvanized	
23	Square Nut	Carbon Steel Zinc Plated	AISI 304, AISI 316
24	Hex Bolt	Carbon Steel Zinc Plated	AISI 304, AISI 316

Field Adjustment:

1. Remove the Top Section from the top of the Indicator Post assembly;
2. Cut the required stem length and adjust the Standpipe to match up to the ground line;
3. Set the "OPEN" and "SHUT" targets for the appropriate valve size;
4. Reattach the Top Section to the top of the Indicator Post assembly.